
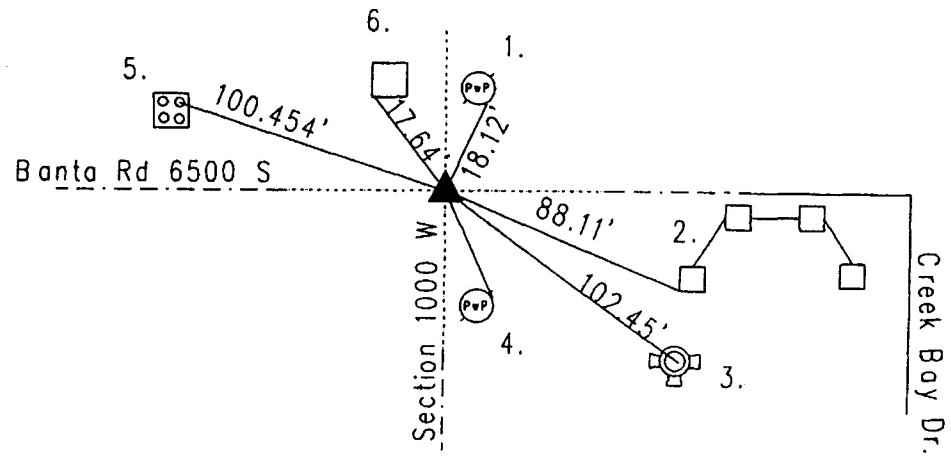
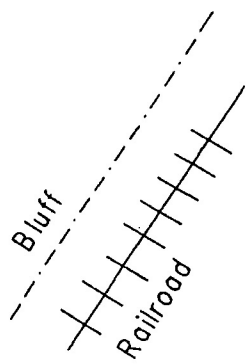


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 11 TOWNSHIP 14 RANGE 3  
DATE: 11-12-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison set on top of axle  
METHOD OF ESTABLISHMENT: County: 5-25-05

IN. S.P.C. E ZONE NAD '83  
NAME: 14031104  
N: 491146.6418(m)  
E: 56166.6188(m)

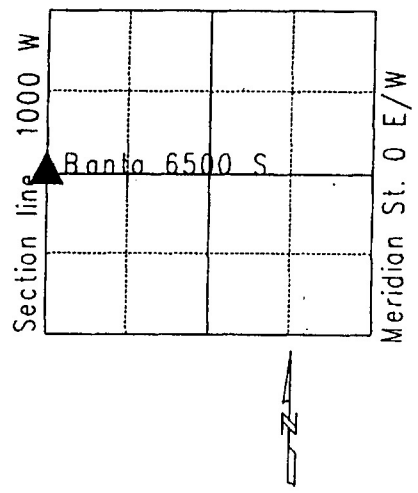

Original Post set 1820 by Laughlin with witnesses: 10" Sugar N 21 W 18 Links; 4" Elm S 31 E 21 Links per the Marion County Atlas pg 5. 8-17-1877 Fatout called out corner with witnesses: 40" Hackberry S 82 1/4 W 65 Links; Rock N 39 1/2 E 29 1/2 Links; Rock S 44 1/2 E 31 1/2 Links on pg. 27, 4-21-1888 Mahern set a stone pg. 23, 5-14-1925 Southard found an Iron Pipe pg. 74, 3-16-45 Thompson set an axle pg. 74, 12-7-56 Universaw found axle by legal survey pg 99. per the Perry Township Legal Survey Book. 2-11-77 Wilcoxon/Hiselman found an axle 9" down; 3-11-81 Wilcoxon found a 1/8" steel pin over axle; 10-8-86 Greene found a PK nail @ the surface; 5-22-95 Wilcoxon found a PK nail at the surface; 1-9-2000 Whiteside found a PK nail @ surface; 5-25-05 Whiteside found shaft of broken PK nail; 11-12-07 Wilcoxon set a harrison monument on top of the axle.

REF.	DISTANCE	DESCRIPTION
1.	18.12'	PK nail F PwP#19-723 10"up
2.	88.11'	SW corner of brick column
3.	102.45'	Top nut of fire hydrant
4.	26.52'	PK nail F PwP#480-754 8"up
5.	100.45'	Cut 'x' NF bolt of railroad crossing signal
6.	17.64'	SW corner of AT & T telephone box on concrete